

Satellite type speaker with 6.5" diameter woofer. Designed for surface mount on wall with 180 adjustable angle. Ideal for installation where speaker system has to be installed on surface. Compatible with 70v distribution network. Four different power settings in 70v. Can also be used in 8 ohms. Woofer and dome tweeter. Very good frequency response. Strong ABS construction. Commercial grade. Can be installed inside or outside. Humidity resistant. Possibility of using a different design type bracket. Removable Euroblock block. Exceptional quality. Easy installation. Not recommended for ceiling installation.

SPECIFICATIONS :


Mounting hardware included

System type:	Surface Speaker 6.25"
Impedance:	7.2 ohm
Sensitivity (1w/1m):	86.4dB
Frequency Response(-10dB):	20Hz~20kHz
Max program power:	80W
Max continuous power, RMS:	50W
Tap selector:	5-position switch with transformer bypass
Low-Frequency voice coil:	25.5mm
Crossover Frequency:	2.5kHz
Network Type: Low pass:	12dB
Network Type: High Pass:	12dB
Enclosure Material:	ABS
Grille:	Aluminum
Inputs:	4-pins connector
Colors:	Black
Height:	305mm
Diameter:	204mm
Weight:	4.3kg
Shipping weight:	20.3kg
Packaging:	2 PRS
Included Accessories:	Bracket
CE:	No
ROHS:	Approved
Transformer tapings:	8 Ohms, 70V or 100V: 2W/4W/7.5W/15W



Graphs and Plots

Frequency Response

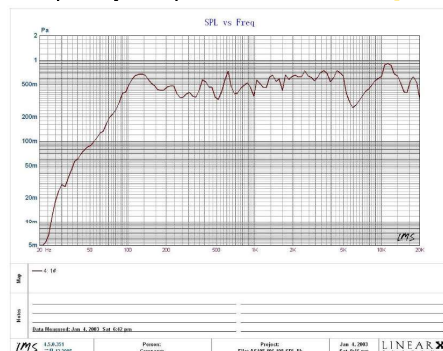

Impedance/Phase

